

BS-1500

Semi-automatic disperser




- ✓ Hydraulic lift, flexible rack rotation
- ✓ Minimal air absorption during stirring dispersion
- ✓ Rapidly dissolves materials and reduces particle size



Configurable Options

- Stainless steel shaft
- Explosion-proof
- Dual axis
- Hand cranked bucket clamp
- Environmentally friendly cylinder head
- Frequency converter
- Strap-type bucket clamp

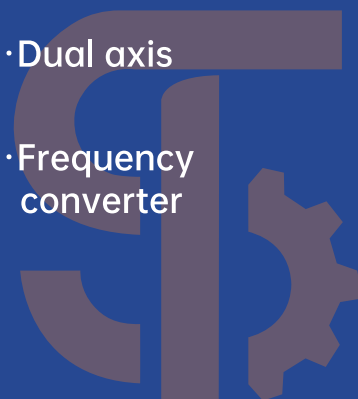

Technical Data

Name	Main Motor Power	Oil Pump Motor Power	Frequency Rotating Speed	Disk Diameter	Maximum Lifting Distance
GFJ-4A	4KW	0.75KW	0-1450r/min	180mm	800mm
GFJ-7.5A	7.5KW	1.1KW	0-1450r/min	250mm	1000mm
GFJ-11A/B	11KW	1.1KW	0-1450r/min	280mm	1000mm
GFJ-15A/B	11.5KW	1.1KW	0-1450r/min	300mm	1000mm
GFJ-18.5A/B	18.5KW	1.5KW	0-1450r/min	300mm	1200mm
GFJ-22A/B	22KW	1.5KW	0-1450r/min	330mm	1200mm
GFJ-30A/B	30KW	1.5KW	0-1450r/min	350mm	1200mm
GFJ-37A/B	37KW	1.5KW	0-1300r/min	380mm	1200mm
GFJ-45B	45KW	1.5KW	10-1300r/min	380mm	1200mm

Name	Weight	External Dimensions(mm)				
/	/	LxB	H1	H2	A	h
GFJ-4A	600KG	11250x520	1520	/	600	220
GFJ-7.5A	1000KG	1815x700	1840	/	900	250
GFJ-11A/B	1200KG	1815x700	1880	/	900	250
GFJ-15A/B	1400KG	1815x700	1880	/	900	250
GFJ-18.5A/B	1600KG	2220x800	2092	/	1100	250
GFJ-22A/B	1800KG	2220x800	2092	/	1100	250
GFJ-30A/B	2000KG	2220x800	2092	/	1100	250
GFJ-37A/B	2200KG	2220x800	2092	/	1100	250
GFJ-45B	3000KG	2220x800	2092	/	1100	250



TEL:0371-55350991 / +86 181 3719 7160

Web: www.sightec.net

Email: bencai@sightec.net / info@sightec.net

Address: D8-3, Hi-tech Enterprise Accelerator Industrial Park, Hi-tech Zone, Zhengzhou City, Henan Province, China



WhatsApp