




DM-48

Swing-Arm Dispenser



- ✓ High efficiency and precision with accuracy of up to 0.1g.
- ✓ Advanced automation to improve production efficiency and lower VOC emissions.
- ✓ Producing and order management, linked with factory ERP



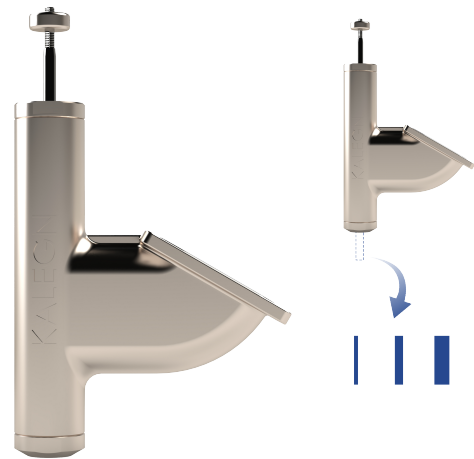

The high-precision multi-stage design balances dispensing efficiency/accuracy (min. 0.1g dripping), with the 304-material valve featuring a reflux function to prevent pipeline blockage.

Technical Data

Working Environment	EX/Non-EX
Application	Water/Solvent Based Products
Number of Valves	Up to 48
Type of Canister	Pails / Drums and/ IBCs
Typical Batch Size	10L-2000L
Performance	3-5 min per 20L, 20-25min 1000L
System Precision	± 1g per 30kg Range, ± 50g per 1000kg Range
Pump Size	0.5"/1"/1.5"
Valve Type	Three-stage Multi Flow Valve
Valve Cleaner	Automatic
Scale	6kg - 2000kg
After Sales	Equipped with remote technical support function

